

Power Transmission According To DIN 5480

- External coolant supply
- To be used for collet DIN 6499
- Collet is not included

DIMENSIONS

ORDER NO.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	P DIN 5480	CODE NO.
DA30548025	30	1-16 ER25	42	6000	1 : 1	101	70	68	W16X0.8	5006-037
DA40548032	40	2-20 ER32	50	6000	1 : 1	110	55	86	W20X0.8	5006-038

Axial Tapping Heads

DIN 5480


DIMENSIONS

ORDER NO.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	P DIN 5480	CODE NO.
TDA30548016	30	1-10 ER16	30	3000	1 : 1	108	71.5	68	W16X0.8	5006-039A
TDA40548020	40	1-13 ER20	35	3000	1 : 1	95.5	55	86	W20X0.8	5006-040A



Axial Milling Heads

DIN 5480

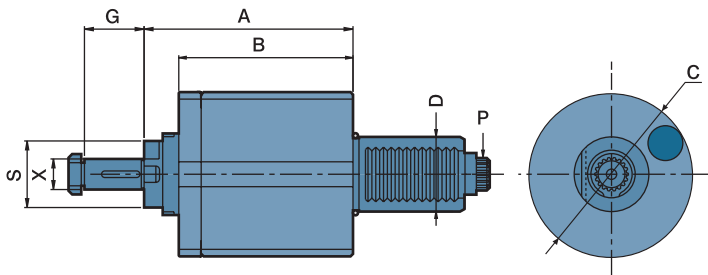

- To be used for cutter arbor according to DIN 6358
- External coolant and intermediate rings supply

DIMENSIONS

ORDER NO.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	G	P DIN 5480	CODE NO.
DA30548016C	30	16	32	3000	1 : 1	91.5	70	68	27	W16X0.8	5006-041
DA40548016C	40	16	32	3000	1 : 1	68.5	55	86	27	W20X0.8	5006-042
DA40548022C	40	22	32	3000	1 : 1	68.5	55	86	31	W20X0.8	5006-043