

Power Transmission According To DIN 5482

- External coolant supply
- To be used for collet DIN 6499
- Collet is not included

DIMENSIONS

ORDER NO.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	P DIN 5482	CODE NO.
DA30548225	30	1-16 ER25	42	6000	1 : 1	101	70	68	B15X12	5006-066
DA40548232	40	2-20 ER32	50	6000	1 : 1	110	73.5	86	B17X14	5006-067
DA50548240	50	3-26 ER40	63	6000	1 : 1	120	81.5	96	B20X17	5006-068
DA60548250	60	10-34 ER50	78	6000	1 : 1	140	88.5	116	B25X22	5006-069

Axial Tapping Heads

DIN 5482


DIMENSIONS

ORDER NO.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	P DIN 5482	CODE NO.
TDA30548216	30	1-10 ER16	30	3000	1 : 1	108	71.5	68	B15X12	5006-070
TDA40548220	40	1-13 ER20	35	3000	1 : 1	95.5	55	86	B17X14	5006-071
TDA50548225	50	1-16 ER25	42	3000	1 : 1	123	81.5	96	B20X17	5006-072
TDA60548232	60	2-20 ER32	50	3000	1 : 1	158.5	88.5	116	B25X22	5006-073



Axial Milling Heads

DIN 5480

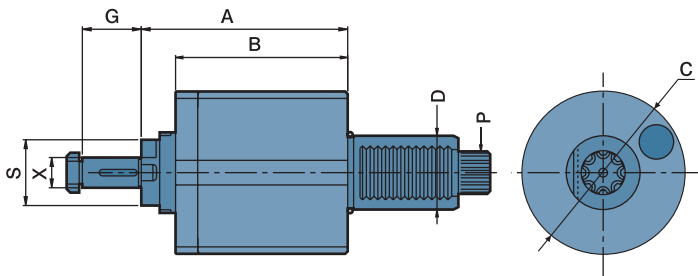

- External coolant and intermediate rings supply
- To be used for cutter arbor according to DIN 6358

DIMENSIONS

ORDER NO.	D DIN 69880	X Capacity	S	Maximum R.P.M.	i	A	B	C	G	P DIN 5482	CODE NO.
DA30548216C	30	16	32	3000	1 : 1	91.5	70	68	27	B15X12	5006-074
DA40548216C	40	16	32	3000	1 : 1	68.5	55	86	27	B17X14	5006-075
DA40548222C	40	22	32	3000	1 : 1	68.5	55	86	31	B17X14	5006-076
DA50548222C	50	22	40	3000	1 : 1	117	81.5	96	31	B20X17	5006-077
DA50548227C	50	27	40	3000	1 : 1	117	88.5	96	33	B20X17	5006-078