




H Type Milling & Drilling Head



MAZAK SUPER QUICK TURN TYPE

FOR 1ST SPINDLE

NEW

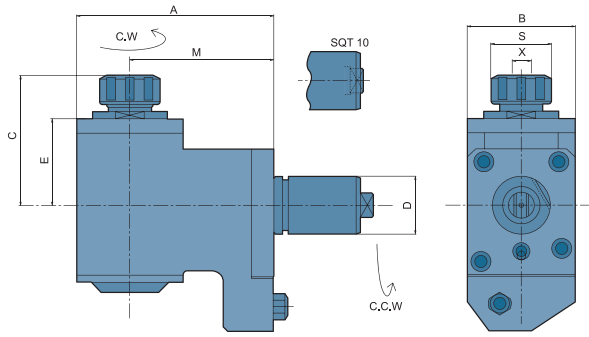

- External coolant supply
- Collet is not included
- To be used for collet DIN 6499

DIMENSIONS

ORDER NO.	Machine Type	D	X Capacity	S	Maximum R.P.M.	A	B	C	E	M	CODE NO.
SQT 10-HMD25	SQT10M-12D 15M-16D SQT200M-16D 250M-16D	40	1-16 ER25	42	5000	137	75	90	60	100	5006-440
SQT 15/18-HMD25	SQT15M-12D 18M-12D SQT200M-12D 250M-12D	40	1-16 ER25	42	5000	167	80	90	60	130	5006-441
SQT 15/18-HMD32			2-20 ER32	50	5000	167	80	92	60	130	5006-442

H Type Tapping Head

DIMENSIONS

ORDER NO.	Machine Type	D	X Capacity	S	Maximum R.P.M.	A	B	C	E	M	CODE NO.
SQT 10-HT16	SQT10M-12D 15M-16D SQT200M-16D 250M-16D	40	1-10 ER16	30	3000	137	75	106	60	100	5006-443
SQT 15/18-HT20	SQT15M-12D 18M-12D SQT200M-12D 250M-12D	40	1-13 ER20	35	3000	167	80	108	60	130	5006-444




H Type Back Milling & Drilling Head

MAZAK SUPER QUICK TURN TYPE

FOR 2ND SPINDLE

NEW

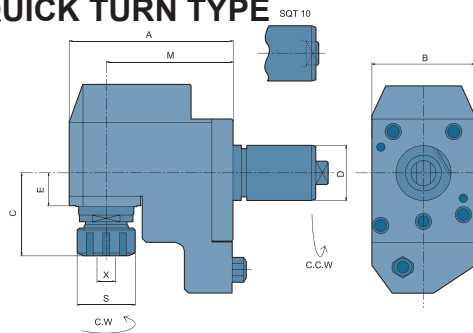

- External coolant supply
- Collet is not included
- To be used for collet DIN 6499

DIMENSIONS

ORDER NO.	Machine Type	D	X Capacity	S	Maximum R.P.M.	A	B	C	E	M	CODE NO.
SQT 10-HBMD25	SQT10M-12D 15M-16D SQT200M-16D 250M-16D	40	1-16 ER25	42	5000	119	75	78	24.5	92	5006-450
SQT 15/18-HBMD25	SQT15M-12D 18M-12D SQT200M-12D 250M-12D	40	1-16 ER25	42	5000	162	80	80	22.5	125	5006-451
SQT 15/18-HBMD32			2-20 ER32	50	5000	162	80	58	22.5	125	5006-452
SQT 15/18-HBMD32-1			2-20 ER32	50	5000	162	80	82.5	22.5	125	5006-453

H Type Tapping Head

DIMENSIONS

ORDER NO.	Machine Type	D	X Capacity	S	Maximum R.P.M.	A	B	C	E	M	CODE NO.
SQT 10-HBT16	SQT10M-12D 15M-16D SQT200M-16D 250M-16D	40	1-10 ER16	30	3000	119	75	66	24.5	92	5006-454
SQT 15/18-HBT20	SQT15M-12D 18M-12D SQT200M-12D 250M-12D	40	1-13 ER20	30	3000	162	80	65	22.5	125	5006-455